



US005941608A

United States Patent [19]

Campau et al.

[11] Patent Number: 5,941,608

[45] Date of Patent: Aug. 24, 1999

[54] ELECTRONIC BRAKE MANAGEMENT SYSTEM WITH MANUAL FAIL SAFE

FOREIGN PATENT DOCUMENTS

4413579 10/1995 Germany.

[75] Inventors: Gregory P. Campau, Plymouth, Mich.;
 Andrew W. Kingston, Heidesheim,
 Germany; Robert L. Ferger, Homburg,
 Germany; Thomas Welgert, Bad
 Soden, Germany; Salvatore Oliveri,
 Filsen, Germany; Blaise J. Ganzel;
 Mark S. Luckevich, both of Ann
 Arbor, Mich.

OTHER PUBLICATIONS

"Electrohydraulic Brake System—The First Approach to
 Brake-By-Wire Technology" by Jonner et al., SAE Tech-
 nical Paper Series #960991, copyright 1996 Society of
 Automotive Engineers, Inc.

"Intelligent Braking for Current and Future Vehicles" by
 Schenk et al., SAE Technical Paper Series #950762, copy-
 right 1995 Society of Automotive Engineers, Inc.

[73] Assignee: Kelsey-Hayes Company, Livonia,
 Mich.

[21] Appl. No.: 08/813,146

[22] Filed: Mar. 7, 1997

Primary Examiner—Chris Schwartz

Attorney, Agent, or Firm—MacMillan, Sobanski & Todd,
 LLC

Related U.S. Application Data

[60] Provisional application No. 60/038,043, Mar. 6, 1997, pro-
 visional application No. 60/032,595, Dec. 2, 1996, pro-
 visional application No. 60/018,814, May 31, 1996, and
 provisional application No. 60/013,005, Mar. 7, 1996.

[51] Int. Cl.⁶ B60T 8/34[52] U.S. Cl. 303/113.4; 303/115.4;
 303/84.2; 303/DIG. 3[58] Field of Search 303/3, 10, 15,
 303/113.4, 122.09, 122.11, 122.13, 155,
 166, DIG. 3, DIG. 4, 115.1, 116.1, 115.4,
 116.2, 84.2

[56] References Cited


U.S. PATENT DOCUMENTS

4,462,642 7/1984 Leiber .
 4,812,777 3/1989 Shirai 303/14
 5,123,713 6/1992 Steiner 303/100
 5,230,549 7/1993 Osada et al. .
 5,261,730 11/1993 Steiner et al. .
 5,312,172 5/1994 Takeuchi .
 5,558,409 9/1996 Walenty et al. .
 5,567,021 10/1996 Gaillard .
 5,588,718 12/1996 Winner et al. .
 5,613,740 3/1997 Kawamoto et al. .

[57] ABSTRACT

An improved electro-hydraulic brake system having features for improving the pedal feel of the system, while further having design features which contribute to the economy of manufacture of certain components of the system. The system provides for an electrically powered normal source of pressurized hydraulic brake fluid, and a manually powered backup source of pressurized hydraulic brake fluid to the vehicle brakes in the event of failure of the normal source. During normal braking, fluid from the backup source is redirected from the vehicle brakes to a pedal simulator. The pedal simulator preferably includes arrangements of spring loaded pistons, expansion volumes, and damping orifices, together with valves selectively controlling the flow of fluid to and from the pedal simulator which provides for an improved pedal feel during vehicle braking. The brake system of the invention further includes a relatively low cost fluid separator unit which is provided which prevents inter-mixing of pressurized fluid between the backup source and the normal source. The fluid separator unit acts to permit the normal source to act upon the hydraulic brake fluid of the backup source to operate the vehicle brakes. The fluid separator unit is preferably embodied as a piston having two working faces, each of the same diameter.

20 Claims, 7 Drawing Sheets

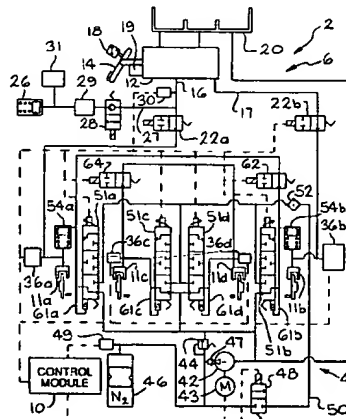

1c971 U.S. PTO
 09/939509
 08/24/01